


# ALIGN

---

## FABRICS


---

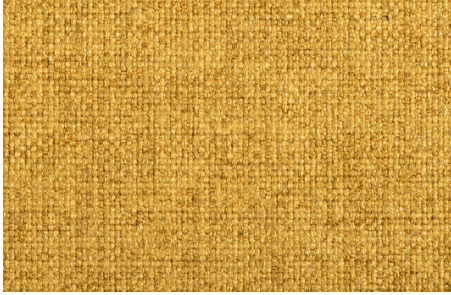

**AL172** Amber




**AL173** Ruby

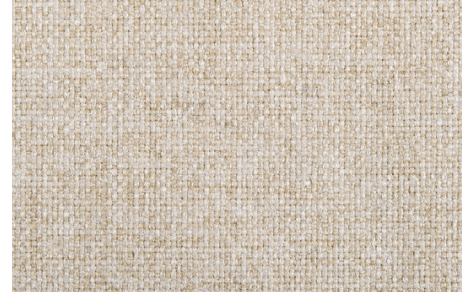


**AL174** Sand



**AL175** Fawn

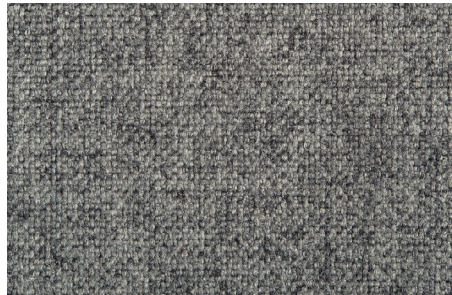

**AL176** Shadow

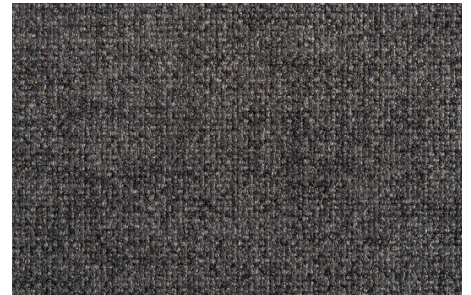

**AL177** Raven

## TECHNICAL INFORMATION

---

<b>Composition</b>	100% Polyester
<b>Weight</b>	388 grams per square meter. 559 grams per linear meter
<b>Width</b>	144cm / 57" +/-2%
<b>Abrasion</b>	In excess of 100,000 cycles {ASTM D4966-12(2016) 12 kPa Martindale & Pilling Tester
<b>Flammability</b>	BS EN 1021-1: 1994 (Cigarette) BS EN 1021-2: 1994 (Match) BS 7176: 1995 Low Hazard BS 476 Part 7 Class 1  California TB 117-2013 Section 1
<b>Fastness to Light</b>	4.0 (AATCC 16.3-2014) 40 Hours (AFU) Exposure
<b>Fastness to Rubbing</b>	Wet: 4.5 Dry: 4.5 (AATCC8-2016)
<b>Tensile Strength</b>	Warp 340.6lbf, Weft 282lbf {ASTM D5034-09 (2017)}
<b>Seam Slippage</b>	Warp 86.4lbf (STB), Weft 88.4lbf (STB) (ASTM D434-1995)
<b>Maintenance &amp; Cleaning</b>	Professional dry cleaning recommended <ul style="list-style-type: none"><li>• Protect from direct sunlight</li><li>• Vacuum regularly using low suction</li><li>• Wipe with a damp cloth using upholstery shampoo</li><li>• Don't scrub or use stiff brush</li><li>• Dry in the shade away from direct heat</li><li>• Allow dry thoroughly before using</li></ul>
<b>Colour Matching</b>	Batch to batch variations in shade may occur within commercial tolerances Sample cuttings from the current stock shades can be obtained on request